03-374 Pressure Relief Valve with G 3/4" pipe thread

ABS Pressure Relief valve with G3/4" thread. A low profile relief valve opening in the range of 0.05-0.12 Bar: This prevents bursting due to excess pressure.



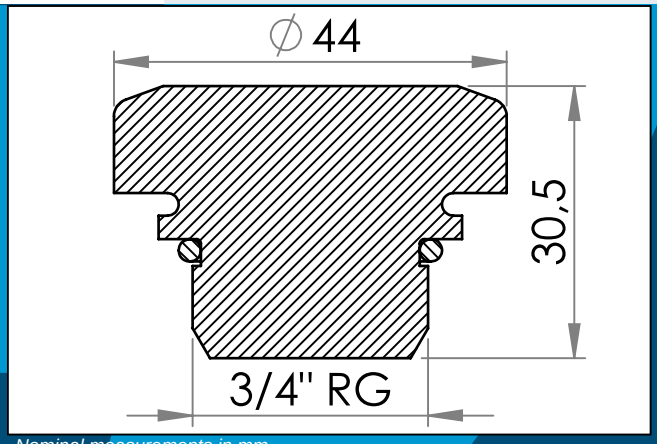

Nominal measurements in mm

ABS Pressure Relief valve with G3/4" thread fitting with the flange 03-601. A low profile relief valve opening in the range of 0.05-0.12 Bar. This prevents bursting due to excess pressure.

Ideal for inflated objects which must be secured against bursting, for instance buoys in which the pressure can grow at increasing temperature.

Carmo's modular valve system is built around a common weldable flange, which is available in materials suitable for HF welding on PUR or PVC.
The valve features a standard 3/4" socket in which the three functional valves can be mounted:

- Inflation valve
- Vaccum valve
- Pressure relief valve

Materials:	ABS+Metal
Std. packaging:	2 x 250
Fits with:	Threaded plastic flange with thread G 3/4", PVC protection Cap with attachment ring - Vented, Retainer Ring for weldable flange
Related products:	03-601, 03-284, 03-474, 03-307

Interested in other colors or materials? Please call for quote...

Carmo A/S, Hoejvangen 19, DK-3060 Espergaerde, Denmark
T: +45 4912 2100, F: +45 4912 2199, E: denmark@carmo.dk
www.carmo.dk

All geometrical dimensions and functional information are indicative. (Unless tolerances are specified).
Carmo is not responsible for misprints and technical changes.